


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

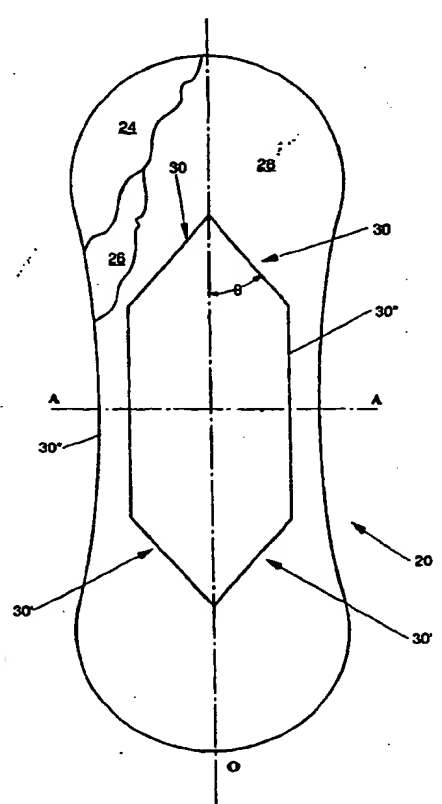

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup>:</b> <b>A61F 13/15</b>	<b>A2</b>	<b>(11) International Publication Number:</b> <b>WO 95/07674</b> <b>(43) International Publication Date:</b> 23 March 1995 (23.03.95)
<b>(21) International Application Number:</b> PCT/US94/10045 <b>(22) International Filing Date:</b> 7 September 1994 (07.09.94) <b>(30) Priority Data:</b> 08/122,114 16 September 1993 (16.09.93) US <b>(71) Applicant:</b> THE PROCTER & GAMBLE COMPANY [US/US]; One Procter & Gamble Plaza, Cincinnati, OH 45202 (US). <b>(72) Inventors:</b> HINES, Letha, Margie; 320 East Mills Avenue, Cincinnati, OH 45215 (US). OLSEN, Robb, Eric; 3214 Grischy Lane, Cincinnati, OH 45208 (US). <b>(74) Agents:</b> REED, T., David et al.; The Procter & Gamble Company, 5299 Spring Grove Avenue, Cincinnati, OH 45217 (US).		<b>(81) Designated States:</b> AM, AU, BB, BG, BR, BY, CA, CH, CN, CZ, EE, FI, GE, HU, JP, KG, KP, KR, KZ, LK, LR, LT, LV, MD, MG, MN, NO, NZ, PL, RO, RU, SI, SK, TJ, TT, UA, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD).  <b>Published</b> <i>Without international search report and to be republished upon receipt of that report.</i>
<b>(54) Title:</b> SANITARY NAPKIN HAVING CORE PREDISPOSED TO A CONVEX UPWARD CONFIGURATION  <b>(57) Abstract</b> <p>A sanitary napkin which deforms to a convex upwardly shaped cross section. The sanitary napkin has a line of weakness which is symmetric about the longitudinal axis and longitudinally concave towards the lateral centerline. In a preferred embodiment, the line of weakness is discontinuous and comprises discrete sites joining the topsheet and core. The discrete sites may be bilaterally staggered about the line of weakness T.</p> 		



**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				



5

10       **SANITARY NAPKIN HAVING CORE PREDISPOSED TO A CONVEX UPWARD  
CONFIGURATION**

15

**FIELD OF THE INVENTION**

This invention relates to sanitary napkins, more particularly to sanitary napkins which improve body contact through a convex upward facing configuration, and more particularly to such sanitary napkins having a core with lines of weakness therein.

20

**BACKGROUND OF THE INVENTION**

Sanitary napkins are well known in the art. Sanitary napkins intercept menses upon discharge, and thereby protect the clothing and bedding of the wearer from soiling due to the menses. However, oftentimes the sanitary napkin can shift in use and the menses will not hit the target area. Additionally, improved menses interception can occur if the sanitary napkin is in close contact with the body of the wearer.

Several attempts have been made in the art to improve body contact with the wearer, and hence absorb menses upon discharge and thereby minimize soiling by providing a sanitary napkin having a convex upward configuration. Examples of such attempts are illustrated in U.S. Patents 2,747,575 issued May 29, 1956 to Mercer; 3,343,543 issued September 26, 1967 to Glassman; 5,171,302 issued December 15, 1992 to Buell; and 5,197,959 issued March 30, 1993 to Buell. The two patents issued to Buell are incorporated herein by reference. However, Glassman suffers from drawbacks which are significant in sanitary napkins successfully commercialized today, and further improvements are possible over Buell.

35

For example, Mercer requires the sanitary napkin to have stitching through its thickness to achieve a longitudinal medial hump. Stitching a sanitary napkin according to today's construction is simply infeasible due to the materials now utilized. Also this process



5 is prohibitively slow and costly.

Glassman requires the sanitary napkin to have longitudinal troughs on the top surface of the sanitary napkin formed by mechanical compression or cutting slits. This sanitary napkin further has a compression formed continuous groove which may or may not include the moisture resistant covering on the back of the sanitary napkin. The groove allows the sanitary napkin to fold into an inverted U-shape. The longitudinal groove, however, does not promote concave cupping of the front of the sanitary napkin around the mons pubis of the wearer and does not fit into the gluteal groove. More importantly, the continuous longitudinal groove prevents the sanitary napkin from having resiliency. Resiliency is the ability of the sanitary napkin to return to an uncompressed configuration when external deformation forces, such as the lateral pressure of the wearer's thighs, are removed. It is important that the sanitary napkin have resiliency, in order that the target area remain as large as possible, and menses does not strike the clothing of the wearer. Furthermore, the compressed groove will have a lower rate of absorbency or a lesser capacity.

Buell teaches a sanitary napkin having a deformation element with flexure hinges. The deformation element is a moldable substance such as foam and may be reformable or resilient. The deformation element and hence the sanitary napkin deforms into a W-shaped cross-section in response to lateral pressure from the wearer's thighs. The deformation element, similar to the Mercer stitching, requires an additional component to be added to the sanitary napkin, thus increasing its cost.

Furthermore, none of these attempts are suitable with particular sanitary napkins which today are commercially successful. Today's sanitary napkins frequently incorporate superabsorbents, have a caliper less than 5 millimeters, and frequently a caliper less than 3 millimeters. Such a sanitary napkin cannot readily be stitched, as taught by Mercer, due to the materials are too thin and lack strength sufficient to support the stitching. Stitching in the Z-direction is infeasible, as well as prohibitively slow and costly. Similarly, sanitary napkins will neither form a cup shape around the mons pubis of the wearer, nor be resilient if grooved on the underside because they are too flexible along the entire longitudinal length. Finally, a deformation element cannot be added to such a sanitary napkin as the caliper would significantly increase. Increased caliper increases the wearer's awareness of the sanitary napkin and decreases her comfort.

Accordingly, it is an object of this invention to provide a sanitary napkin which provides a convex upwardly facing cross-section. It is further an object of this invention to provide a sanitary napkin which is concave towards the mons pubis of the wearer. It is



- 5 finally an object of this invention to provide a sanitary napkin which has resiliency without adding a separate element.

### SUMMARY OF THE INVENTION

10 The invention comprises a sanitary napkin having mutually orthogonal longitudinal and lateral centerlines. The sanitary napkin has a liquid pervious topsheet, a liquid impervious backsheet, and an absorbent core intermediate the topsheet and the backsheet. The absorbent core has a first major face oriented towards the topsheet. In the first major face of the absorbent core is a line of weakness. The line of weakness is longitudinally concave towards the lateral centerline.

15 In a preferred embodiment, the first line of weakness is formed by a series of discrete sites. The discrete sites may join the topsheet and core by heat, compression, or a combination thereof.

The sanitary napkin may also have a second line of weakness concave towards said first line of weakness and concave towards the lateral centerline. The sanitary napkin may have yet additional lines of weakness concave away from the longitudinal centerline.

20 The first and second lines of weakness allow the sanitary napkin to deform to a convex upward configuration at the vaginal orifice and gluteal groove, and a concave upward configuration around the mons pubis of the wearer. The additional lines of weakness allow the sanitary napkin to deform to a W-shaped cross section in response to lateral pressure from the thighs of the wearer.

### BRIEF DESCRIPTION OF THE DRAWINGS

- Figure 1 is a top plan view of a sanitary napkin according to the present invention shown partially in cutaway and having a continuous line of weakness;
- 30 Figure 2 is a top plan view of a sanitary napkin according to the present invention having two discontinuous lines of weakness;
- Figure 3 is a vertical sectional view taken along line 3-3 of Figure 2;
- Figure 4 is a top plan view of an alternative embodiment of the present invention having additional lines of weakness oriented convex outwardly from the longitudinal centerline;
- 35 Figure 5 is an end view of the sanitary napkin of Figure 4 deformed to a convex upwards configuration with a W-shaped cross section; and
- Figure 6 is a top plan view on an alternative embodiment, similar to Figure 4, and having both the first and second lines of weakness intercept the lateral centerline.



## 5 DETAILED DESCRIPTION OF THE INVENTION

As used herein, the term "absorbent article" refers to devices which absorb and contain body exudates, and, more specifically, refers to devices which are placed against or in proximity to the body of the wearer to absorb and contain the various exudates discharged from the body. The term "disposable" is used herein to describe absorbent articles which are not intended to be laundered or otherwise restored or reused as an absorbent article (i.e., they are intended to be discarded after a single use, and, preferably, to be recycled, composted or otherwise disposed of in an environmentally compatible manner). A "unitary" absorbent article refers to absorbent articles which are formed of separate parts united together to form a coordinated entity so that they do not require separate manipulative parts like a separate holder and pad. A preferred embodiment of a unitary disposable absorbent article of the present invention is the catamenial pad, sanitary napkin 20, shown in Figure 1. As used herein, the term "sanitary napkin" refers to an absorbent article which is worn by females adjacent to the pudendal region, generally external to the urogenital region, and which is intended to absorb and contain menstrual fluids and other vaginal discharges from the wearer's body (e.g., blood, menses, and urine). Interlabial devices which reside partially within and partially external of the wearer's vestibule are also within the scope of this invention. It should be understood, however, that the present invention is also applicable to other feminine hygiene or catamenial pads such as panty liners, or other absorbent articles such as incontinence pads, and the like.

Figure 1 is a plan view of the sanitary napkin 20 of the present invention in its flat-out state with portions of the structure being cut-away to more clearly show the construction of the sanitary napkin 20 and with the portion of the sanitary napkin 20 which faces or contacts the wearer, oriented towards the viewer. As shown in Figure 1, the sanitary napkin 20 preferably comprises a liquid pervious topsheet 24, a liquid impervious backsheet 26 joined with the topsheet 24, and absorbent core 28 positioned between the topsheet 24 and the backsheet 26. The absorbent core 28 has two major faces, a first major face oriented towards the topsheet 24 and a second major face oriented towards the backsheet 26. The first major face is on the tension side of the absorbent core 28 when it is deformed to a convex upwards configuration. Several lines of weakness are disposed in the core 28 on the first major face.

The sanitary napkin 20 has two centerlines, a longitudinal centerline O-O and a lateral centerline A-A. The term "longitudinal" as used herein, refers to a line, axis or direction in the plane of the sanitary napkin 20 that is generally aligned with (e.g., approximately parallel to) a vertical plane which bisects a standing wearer into left and



5 right body halves when the sanitary napkin 20 is worn. The terms "transverse" or "lateral" as used herein, are interchangeable, and refer to a line, axis or direction which lies within the plane of the sanitary napkin 20 and is generally perpendicular to the longitudinal direction. The Z-direction is orthogonal both the longitudinal and lateral centerlines of the sanitary napkin 20 and extends outwardly from the plane of the sanitary napkin 20, which  
10 is defined by the longitudinal centerline O-O and lateral centerline A-A.

The long edges of the sanitary napkin 20, which are aligned with the longitudinal axis, are the longitudinal side margins of the sanitary napkin 20. The ends of the sanitary napkin 20 joining the longitudinal side margins are the transverse ends of the sanitary napkin 20. Collectively the longitudinal side margins and transverse ends of the sanitary  
15 napkin 20 define its periphery.

While the topsheet 24, the backsheet 26, and the absorbent core 28 may be assembled in a variety of well known configurations (including so called "tube" products or side flap products), preferred sanitary napkin configurations are described generally in U.S. Patent 4,950,264, "Thin, Flexible Sanitary Napkin" issued to Osborn on August 21,  
20 1990; U.S. Patent 4,425,130, "Compound Sanitary Napkin" issued to DesMarais on January 10, 1984; U.S. Patent 4,321,924, "Bordered Disposable Absorbent Article" issued to Ahr on March 30, 1982; U.S. Patent 4,589,876, "Shaped Sanitary Napkin With Flaps" issued to Van Tilburg on August 18, 1987. Each of these patents are hereby incorporated herein by reference. Figure 1 shows a preferred embodiment of the sanitary napkin 20 in  
25 which the topsheet 24 and the backsheet 26 have length and width dimensions generally larger than those of the absorbent core 28. The topsheet 24 and the backsheet 26 extend beyond the edges of the absorbent core 28 to thereby form not only portions of the periphery but also side flaps.

The absorbent core 28 may be any absorbent means capable of absorbing or  
30 retaining liquids (e.g., menses and/or urine). The absorbent core 28 may be manufactured in a wide variety of sizes and shapes (e.g., rectangular, oval, hourglass, dog bone, asymmetric, etc.) and from a wide variety of liquid-absorbent materials commonly used in sanitary napkins and other absorbent articles such as comminuted wood pulp which is generally referred to as airfelt. Examples of other suitable absorbent materials include  
35 creped cellulose wadding; meltblown polymers including coform; chemically stiffened, modified or cross-linked cellulosic fibers; synthetic fibers such as crimped polyester or polyolefin fibers; peat moss; tissue including tissue wraps and tissue laminates; absorbent foams; absorbent sponges; superabsorbent polymers; absorbent gelling materials; or any equivalent material or combinations of materials, of mixtures of these. A particularly  
40 preferred absorbent core 28 is made of thermally bonded airlaid material having



5 approximately 15 percent synthetic fibers. Synthetic fibers are preferred due to the ease with which they fuse together to join the core 28 and topsheet 24 as described below. A particularly preferred synthetic fiber is a bi-component material having a polyethylene sheath and a polypropylene center.

10 The configuration and construction of the absorbent core 28 may also be varied (e.g., the absorbent core 28 may have varying caliper zones (e.g., profiled so as to be thicker in the center), hydrophilic gradients, superabsorbent gradients, or lower density and lower average basis weight acquisition zones; or may comprise one or more layers or structures). The total absorbent capacity of the absorbent core 28 should, however, be compatible with the design loading and the intended use of the sanitary napkin 20.  
15 Further, the size and absorbent capacity of the absorbent core 28 may be varied to accommodate different uses such as incontinence pads, panty liners, regular sanitary napkins, or overnight sanitary napkins.

The backsheet 26 is impervious to liquids and is preferably manufactured from a thin plastic film, although other flexible liquid impervious materials may also be used. As used  
20 herein, the term "flexible" refers to materials which are compliant and will readily conform to the general shape and contours of the human body. The backsheet 26 prevents exudates absorbed and contained in the absorbent core 28 from wetting the clothing and bedding of the wearer. The backsheet 26 may alternatively comprise a film-coated nonwoven material. Preferably, the backsheet 26 is a polyethylene film having a thickness  
25 of from about 0.012 mm (0.5 mil) to about 0.051 mm (2.0 mils). Exemplary polyethylene films are manufactured by Clopay Corporation of Cincinnati, Ohio, under the designation 161-0001, and by Tredegar Corporation, of Terre Haute, Indiana, under the designation XP-39385.

The backsheet 26 has an inwardly oriented surface oriented towards the absorbent  
30 core 28 and an outwardly oriented surface opposed thereto. The outwardly oriented surface of the backsheet 26 faces, and in use contacts, the undergarment of the wearer. If desired, strips of adhesive may be joined to the outwardly facing surface of the backsheet 26 to facilitate attachment of the sanitary napkin 20 to the undergarment of the wearer.

The topsheet 24 is compliant, soft feeling, and non-irritating to the wearer's skin.  
35 Further, the topsheet 24 is liquid pervious permitting liquids (e.g., menses and/or urine) to readily penetrate through its thickness. A suitable topsheet 24 may be manufactured from apertured formed films, foams, or woven and nonwoven materials comprised of natural or synthetic fibers. A preferred topsheet 24 comprises an apertured formed film as described in U.S. Patent 3,929,135, entitled "Absorptive Structures Having Tapered Capillaries,"  
40 which issued to Thompson on December 30, 1975; U.S. Patent 4,324,246 entitled



5 "Disposable Absorbent Article Having A Stain Resistant Topsheet," which issued to Mullane, et al. on April 13, 1982; U.S. Patent 4,342,314 entitled "Resilient Plastic Web Exhibiting Fiber-Like Properties," which issued to Radel et al. on August 3, 1982; U.S. Patent 4,463,045 entitled "Macroscopically Expanded Three-Dimensional Plastic Web Exhibiting Non-Glossy Visible Surface and Cloth-Like Tactile Impression," which issued  
10 to Ahr et al. on July 31, 1984; and U.S. Patent 5,006,394 entitled "Multilayer Polymeric Film," which issued to Baird on April 9, 1991. Each of these patents is incorporated herein by reference.

The preferred topsheet 24 for the present invention is the formed film described in one or more of the above patents and marketed by The Procter & Gamble Company of Cincinnati, Ohio as "DRI-WEAVE" for sanitary napkins 20. For the invention described  
15 and claimed herein, it is preferred that the topsheet 24 be synthetic, so that the topsheet 24 can be joined to synthetic fibers of the absorbent core 28 by heat. For the embodiments described herein, the topsheet 24 and the core 28 may be joined at continuous or discontinuous lines of weakness 30, 30' using embossing plates having a surface  
20 temperature of about 149 to 177 degrees C. The embossing plates may be used to apply pressure to the topsheet 24 and core 28, each having synthetic materials, for about 10 seconds.

The backsheet 26 and the topsheet 24 are positioned adjacent the first and second major faces of the core 28 respectively, so that the core 28 is intermediate the backsheet  
25 26 and topsheet 24. The backsheet 26 and topsheet 24 are preferably joined thereto and to each other by attachment means (not shown) such as are well known in the art. Adhesives which have been found to be satisfactory attachment means are manufactured by H. B. Fuller Company of St. Paul, Minnesota under the designation HL-1258 or H-2031. The attachment means will preferably comprise an open pattern network of  
30 filaments of adhesive as is disclosed in U.S. Patent 4,573,986 entitled "Disposable Waste-Containment Garment," which issued to Minetola et al. on March 4, 1986, and which is incorporated herein by reference. Alternative attachment means comprise heat, pressure, ultrasonic, and dynamic mechanical bonds.

In an alternative embodiment of the present invention, the sanitary napkin 20 has  
35 two flaps (not shown), each of which extend laterally beyond the longitudinal side margins of the sanitary napkin 20. The flaps are configured to drape over the edges of the wearer's undergarment. The flaps help prevent soiling by menstrual fluid, preferably by forming a double walled barrier along the edges of the undergarment. The flaps are preferably provided with attachment means on the garment surface, so that they can be folded back



5 underneath the crotch of the undergarment. In this way the flaps serve to keep the sanitary napkin 20 properly positioned.

The flaps may be constructed of various materials including materials used for the topsheet 24, backsheet 26, combinations thereof, and may be a laminate having tissue in the center. Further, the flaps may be a separate element attached to the main body of the  
10 sanitary napkin 20 or can comprise extensions of the topsheet 24 and/or backsheet 26. Preferred flaps may be made in accordance with U.S. Patents 4,589,876 issued May 20, 1986 to Van Tilburg or 4,687,478 issued August 18, 1987 to Van Tilburg. Both of these patents are incorporated herein by reference.

The flaps extend outwardly from a proximal end joined to the sanitary napkin 20 at a  
15 distal edge. For the embodiments described herein, it is preferable that the proximal ends of the flaps be joined to the garment facing surface of the backsheet 26 of the sanitary napkin 20 at a location inboard of said longitudinal sides of said sanitary napkin 20.

The first major face of the sanitary napkin 20 has a first line of weakness 30 therein. The line of weakness 30 may be continuous or discrete. The line of weakness 30 may be  
20 made in any number of ways, such as by compression or by cutting into the core 28 of the sanitary napkin 20. The sanitary napkin 20 deforms or bends about the line of weakness 30.

The first line of weakness 30 is preferably longitudinally concave. By "longitudinally concave" it is meant that the line of weakness is symmetric about the longitudinal axis and  
25 concave in the longitudinal direction. More particularly, the line of weakness 30 is longitudinally concave towards the lateral centerline A-A of the sanitary napkin 20.

The first line of weakness 30 allows the sanitary napkin 20 to conform to a convex upward configuration, particularly the portion of the sanitary napkin 20 intercepted by the concavity of the line of weakness. This arrangement allows the sanitary napkin 20 to  
30 deform to a convex upward configuration at the vaginal orifice, in response to lateral pressure imposed by the thighs of the wearer.

The first line of weakness 30 which is longitudinally concave towards the lateral centerline A-A should be oriented to the front of the sanitary napkin 20 as it is worn. This wearing arrangement allows the sanitary napkin 20 to form a concave upward  
35 configuration around the mons pubis of the wearer.

The first line of weakness 30 forms an included angle  $\Theta$  with the longitudinal axis O-O of about 15 to about 50 degrees, preferably about 20 degrees. For the embodiments described herein having a sanitary napkin 20, having an overall longitudinal length of about 21 centimeters, the first line of weakness 30 may have a length of about 2.5 to about  
40 6.0 centimeters, as measured from the vertex on the longitudinal centerline O-O to the



5 point of the first line of weakness 30 which is most remote from the longitudinal centerline O-O.

In a more preferred embodiment, the sanitary napkin 20 further comprises a second line of weakness 30'. The second line of weakness 30' is also longitudinally concave towards the lateral centerline A-A. This arrangement allows the sanitary napkin 20 to be worn in either orientation without the wearer having to consider whether or not she is putting it on properly or backwards.

10 If desired, the first and second lines of weakness 30, 30' may be connected by longitudinally oriented, preferably longitudinally parallel, intermediate lines of weakness 30". The intermediate lines of weakness 30" may be parallel (as shown) or may be convergent/divergent if the first and second lines of weakness 30, 30' do not extend equally from the longitudinal centerline O-O.

Referring to Figure 2, the second line of weakness 30' which is longitudinally concave towards the lateral centerline A-A is disposed in the rear of the sanitary napkin 20 as it is worn. This arrangement allows the sanitary napkin 20 to be worn in either orientation without the wearer having to consider whether or not she is putting it on properly or backwards. This arrangement provides two lines of weakness 30, 30', which may be symmetrically opposite about the lateral centerline A-A and are preferably symmetrically opposite about the longitudinal centerline O-O. Of course, as discussed below, the symmetry of the first and second lines of weakness 30, 30' does not preclude the sanitary napkin 20 according to the present invention from comprising additional lines of weakness 34 as illustrated in Figure 4.

The first and second lines of weakness 30, 30' in Figure 2 are defined by a series of discontinuous sites. The regions intermediate the discrete sites 36 are not weakened by compressing or cutting as described herein.

30 A discontinuous line of weakness 30, 30', or 34 as shown in Figures 2 - 4 provides advantages over a continuous line of weakness 30, 30', 34. For example, either a continuous or a discontinuous line of weakness 30, 30', 34 will cause the sanitary napkin 20 to preferentially deform to the convex upward configuration described above. However, the inflection point at the discontinuous line of weakness 30, 30', 34 typically occurs at a vertex. A sharp vertex at the inflection point is generally not desirable because it destroys, or at least minimizes, the resiliency of the sanitary napkin 20 and further is less comfortable to the wearer and excessively compresses the core 28, resulting in a lesser absorbency rate or capacity.

40 Further, the uncompressed areas between the discrete sites 36 maintain their absorbency. The discrete sites 36 which comprise the first and second lines of weakness



5 30, 30' of Figures 2 - 4 may comprise any geometric shape, such as ellipses, triangles, or rectangles. However, circles are a preferred shape for the discrete sites 36 due to the consumers' aesthetic preference for feminine, round shapes. Furthermore, the absence of sharp corners on the discrete sites 36 minimizes the tendency of the topsheet 24 to tear or otherwise have undesirable stress concentrations in the topsheet 24 and core 28. If circles  
10 are selected for the shape of the discrete sites 36, the circles may range in diameter from about 1.5 to about 2.0 millimeters for the embodiments described herein, and may be spaced approximately 5 millimeters apart center to center. The discrete sites 36 may, for the embodiments described herein, be approximately 1 millimeter deep, extending through the topsheet 24 into the absorbent core 28. This arrangement provides the advantage that  
15 the adhesive commonly used to join the topsheet 24 and the core 28 may be eliminated, so that the sanitary napkin 20 is free of such adhesive.

Alternatively, additional discrete sites 36' may be dispersed throughout a portion of or the entirety of the first major face of the core 28, without conforming to or being juxtaposed with a particular line of weakness 30, 30', 34. In this embodiment, the lines of  
20 weakness 30, 30', and 34 may be formed by a higher density of discrete sites 36. The discrete sites 36 preferably comprise not more than about five percent of the surface area of the core 28.

Alternatively, as illustrated in Figure 2, it is more preferred that the discrete sites 36 which comprise the lines of weakness 30, 30', 34 and any other discrete sites 36 present in  
25 the sanitary napkin 20 be limited to the central trisection of the sanitary napkin 20. For a sanitary napkin 20 having a core 28 with a longitudinal length of about 16 to about 21 centimeters, the discrete sites 36 which comprise the line of weakness and any other discrete sites 36 which weaken the core 28 should be limited to the region about 35 to about 55 millimeters on either side of the lateral centerline A-A.

30 The discrete sites 36 may be bilaterally staggered about the theoretical line of weakness T as shown. By bilaterally staggered it is meant that the theoretical line of weakness T (having no thickness) passes between the centers of the discrete sites 36 which define the line of weakness 30, 30'. Of course, segments of the discrete sites 36 may overlap the theoretical line of weakness T but the centers of the discrete sites 36 do  
35 not. This arrangement provides the advantage that a more gradual axis of bending occurs, improving the resiliency of the sanitary napkin 20 and its ability to return to provide the full target area for the wearer.

Referring to Figure 3, in a particularly preferred embodiment, the discrete sites 36 are caused by compression of the core 28 coincident with heat. This arrangement joins the  
40 core 28 to the topsheet 24 at the discrete sites 36. Joining the core 28 and topsheet 24



5 together at discrete sites 36 integrates these two components of the sanitary napkin 20 into a single layer, providing for improved fluid handling properties. By having discrete sites 36 which maintain a desired core 28 structure in the uncompressed areas, menses absorbed into the core 28 of the sanitary napkin 20 can spread throughout its entirety, and not be restricted to the area of the sanitary napkin 20 intercepted by the lines of weakness 10 30, 30', 34, as would be the case if a continuous line were compressed into the sanitary napkin 20. However, either continuous or discontinuous lines of weakness 30, 30', 34 which join and integrate the topsheet 24 and core 28 provide for more rapid absorption of menses deposited on the topsheet 24.

Referring to Figure 4, the sanitary napkin 20 may comprise third and fourth lines of 15 weakness 34 disposed on opposite sides of the longitudinal centerline O-O and oriented laterally concave away from said longitudinal centerline O-O. The third and fourth lines of weakness 34 are symmetrically opposite about the longitudinal centerline O-O. The area of the core 28 intercepted by the third and fourth lines of weakness 34 deforms upwards at the longitudinal side margins in response to the lateral pressure from the wearer's thighs.

20 Referring to Figure 5, this arrangement forms a vertex at the third and fourth lines of weakness 34 so that the sanitary napkin 20 assumes and deforms to a W-shaped cross-section in response to the lateral pressure from the thighs of the wearer. This arrangement provides the advantage that better conformity to the gluteal groove of the wearer occurs. This arrangement provides the further advantage that lines of weakness 30, 30', 34 in a 25 relatively thin sanitary napkin 20 having the arrangement shown will provide a concave upward configuration at the mons pubis, a W-shaped cross section at the vaginal opening, providing improved introital contact, and a convex upward shape at the gluteal groove. This arrangement provides the further advantage that menses wicking or flowing in the lateral direction is inhibited from flowing off the edge of the sanitary napkin 20 and soiling 30 the clothing or bedding of the wearer. Additionally, the bending of the sanitary napkin 20 about the lines of weakness 30, 30', 34 increase the stiffness of the sanitary napkin 20, thereby reducing occurrences of foldover which diminish the target area. This arrangement is particularly advantageous on relatively long sanitary napkins 20.

In use, the sanitary napkin 20 can be held in place by means well known in the art. 35 Preferably the sanitary napkin 20 is placed in the wearer's undergarment and secured thereto by fastening adhesive. The fastening adhesive is joined to the garment facing surface of the backsheet 26. Suitable adhesives are Century A-305-IV manufactured by Century Adhesives Corporation of Columbus, Ohio; Instant Lock 34-2823 manufactured by the National Starch and Chemical Company of Bridgewater, New Jersey and 40 XG-0176-111 manufactured by 3 Sigma of Covington, Ohio. The fastening adhesive may



5 be covered with any commercially available release liner commonly used for such purposes.

To maintain the W-shaped cross section, a preferred panty fastening adhesive has a V-shape, symmetric about the longitudinal centerline O-O, and which radiates outwardly therefrom as either end of the sanitary napkin 20 is approached. A particularly preferred arrangement for such fastening adhesive is disclosed in commonly assigned U.S. patent  
10 application Serial No. 07/915,134 filed July 23, 1992, in the names of Hines et al., and the corresponding international application PCT/US92/06054.

The sanitary napkin 20 may further comprise additional lines of weakness (not shown) having a V-shape and adapted to be disposed in the rear of the sanitary napkin 20  
15 as it is worn. Such additional lines of weakness may also be symmetric about the longitudinal centerline O-O, and radiate outwardly therefrom as the end of the sanitary napkin 20 is approached.

Referring to Figure 6, if desired, the first and second lines of weakness 30, 30' may intercept the lateral centerline A-A. In this arrangement, the first and second lines of  
20 weakness 30, 30' are connected to each other, without requiring intermediate lines of weakness 30". Such an embodiment may also have third and fourth lines of weakness 34, which intercept the first and second lines of weakness 30, 30' at the lateral centerline A-A. Such an arrangement provides two vertices coincident the lateral centerline A-A and symmetrically opposite the longitudinal centerline O-O.

25 While it will be apparent that many other configurations, combinations and permutations of the foregoing are feasible, and such variations fall with the scope of the appended claims.



## WHAT IS CLAIMED IS:

1. A sanitary napkin having a longitudinal centerline and a lateral centerline orthogonal thereto, and having longitudinal side margins and transverse ends, said sanitary napkin comprising:  
a liquid pervious topsheet;  
a liquid impervious backsheet; and  
an absorbent core intermediate said topsheet and said backsheet, said core having two major faces, a first major face oriented toward said topsheet and a second major face oriented toward said backsheet, preferably said sanitary napkin is free of adhesive joining said core and said topsheet, said first major face having a line of weakness therein and characterized in that said line of weakness comprises discrete sites, said line of weakness being longitudinally concave towards said lateral centerline, wherein said sanitary napkin deforms to a convex upward configuration while in use.
2. A sanitary napkin according to Claim 1 characterized in that said line of weakness comprises compressed regions in said core and preferably said line of weakness joins said core and said topsheet.
3. A sanitary napkin according to Claim 1 characterized in that said line of weakness comprises cuts or slits in said core.
4. A sanitary napkin according to Claims 1, 2, and 3 further comprising second and third lines of weakness in said core on the opposite sides of said longitudinal centerline and being laterally concave away from said longitudinal centerline.
5. A sanitary napkin according to Claims 1, 2, 3, and 4 further comprising V-shaped lines of weakness radiating outwardly from said longitudinal centerline as the end of the sanitary napkin is approached, and preferably said core further comprises third and fourth lines of weakness on the opposite sides of said longitudinal centerline and being laterally concave away from said longitudinal centerline.
6. A sanitary napkin according to Claims 1, 2, 3, 4, and 5 further comprising flaps for attachment to the undergarment of a wearer, characterized in that said flaps are joined to said backsheet inboard of said longitudinal side margins of said sanitary napkin, said sanitary napkin further comprising two lines of weakness symmetrically opposite about said longitudinal centerline and oriented concave outward therefrom, said further lines of weakness having a vertex juxtaposed with said lateral centerline.



7. A sanitary napkin according to Claims 1, 2, 3, 4, 5, and 6 wherein said sanitary napkin deforms to a W-shaped cross section in response to lateral pressure from the thighs of the wearer.
8. A sanitary napkin according to Claims 1, 2, 3, 4, 5, 6, and 7 characterized in that said backsheet has an inwardly oriented surface oriented towards said core and an outwardly oriented surface opposed thereto and which contacts the garment of the wearer, said sanitary napkin further comprising strips of adhesive for attachment of the sanitary napkin to the undergarment of the wearer, said strips of adhesive radiating outwardly from the longitudinal centerline, towards an end of the sanitary napkin.
9. A sanitary napkin having a longitudinal centerline and a lateral centerline orthogonal thereto, and having longitudinal side margins and transverse ends, said sanitary napkin comprising: a liquid pervious topsheet; a liquid impervious backsheet; and an absorbent core intermediate said topsheet and said backsheet, characterized in that said absorbent core and said topsheet are joined together at discrete sites forming a line of weakness symmetric about said longitudinal axis and longitudinally concave towards said lateral centerline, preferably further comprising a second line of weakness concave towards said first line of weakness and concave towards said lateral centerline.
10. A sanitary napkin according to Claim 9 characterized in that said discrete sites are bilaterally staggered about said line of weakness.



1/4



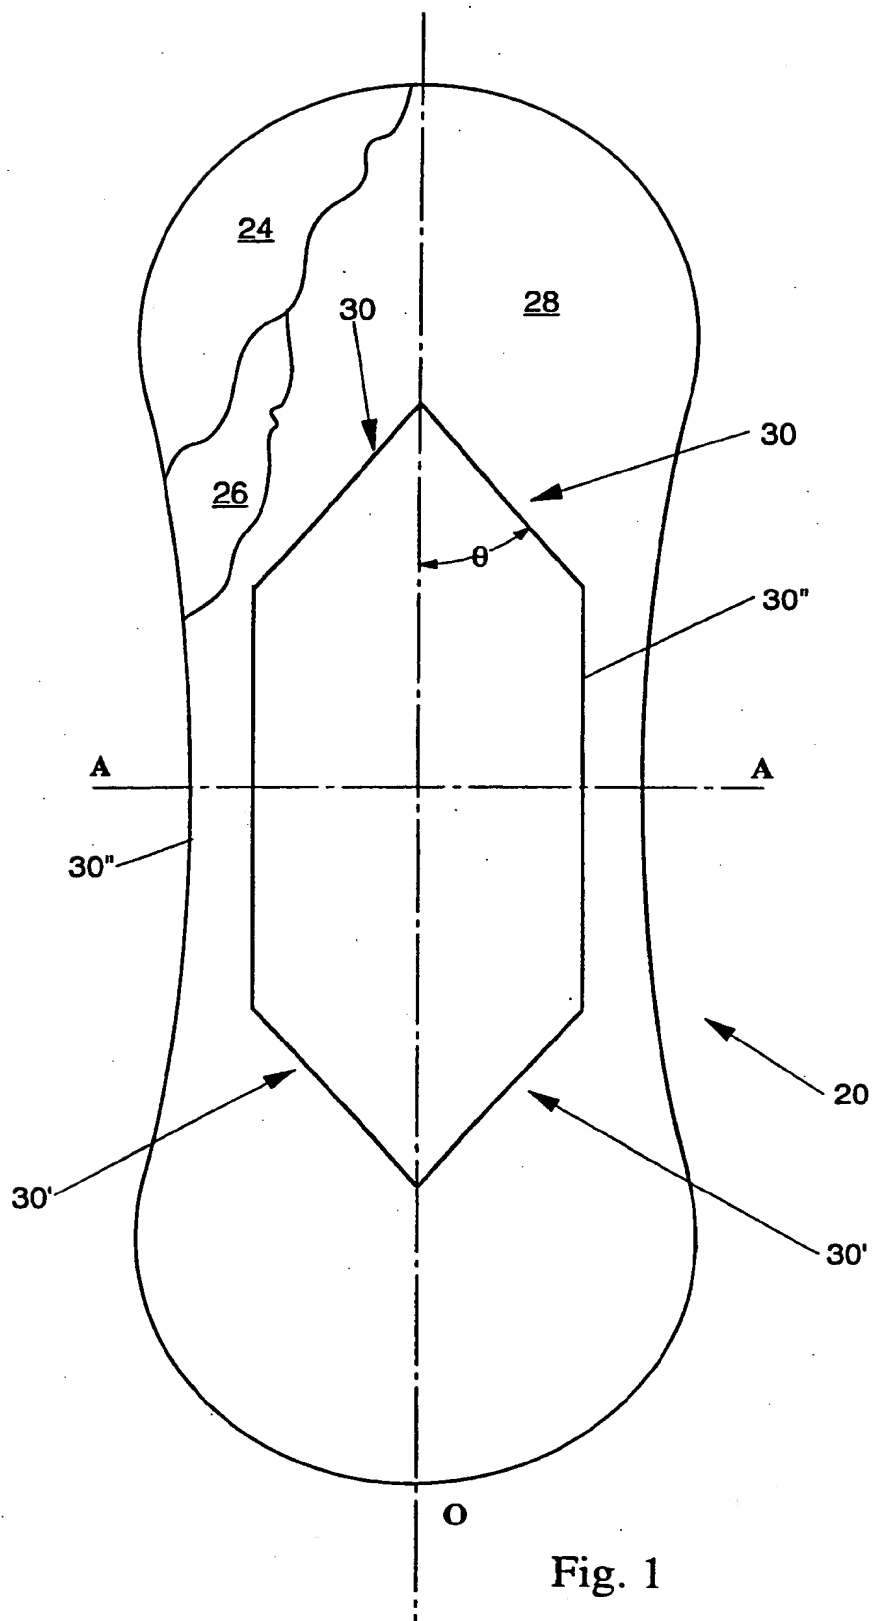


Fig. 1



2/4

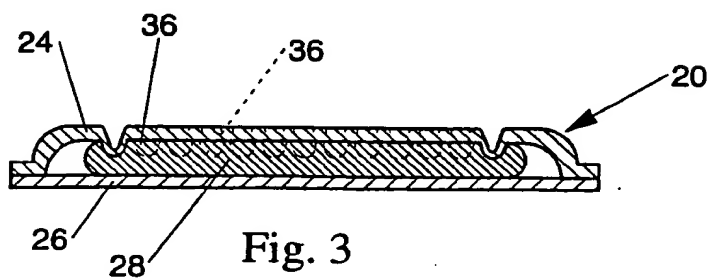

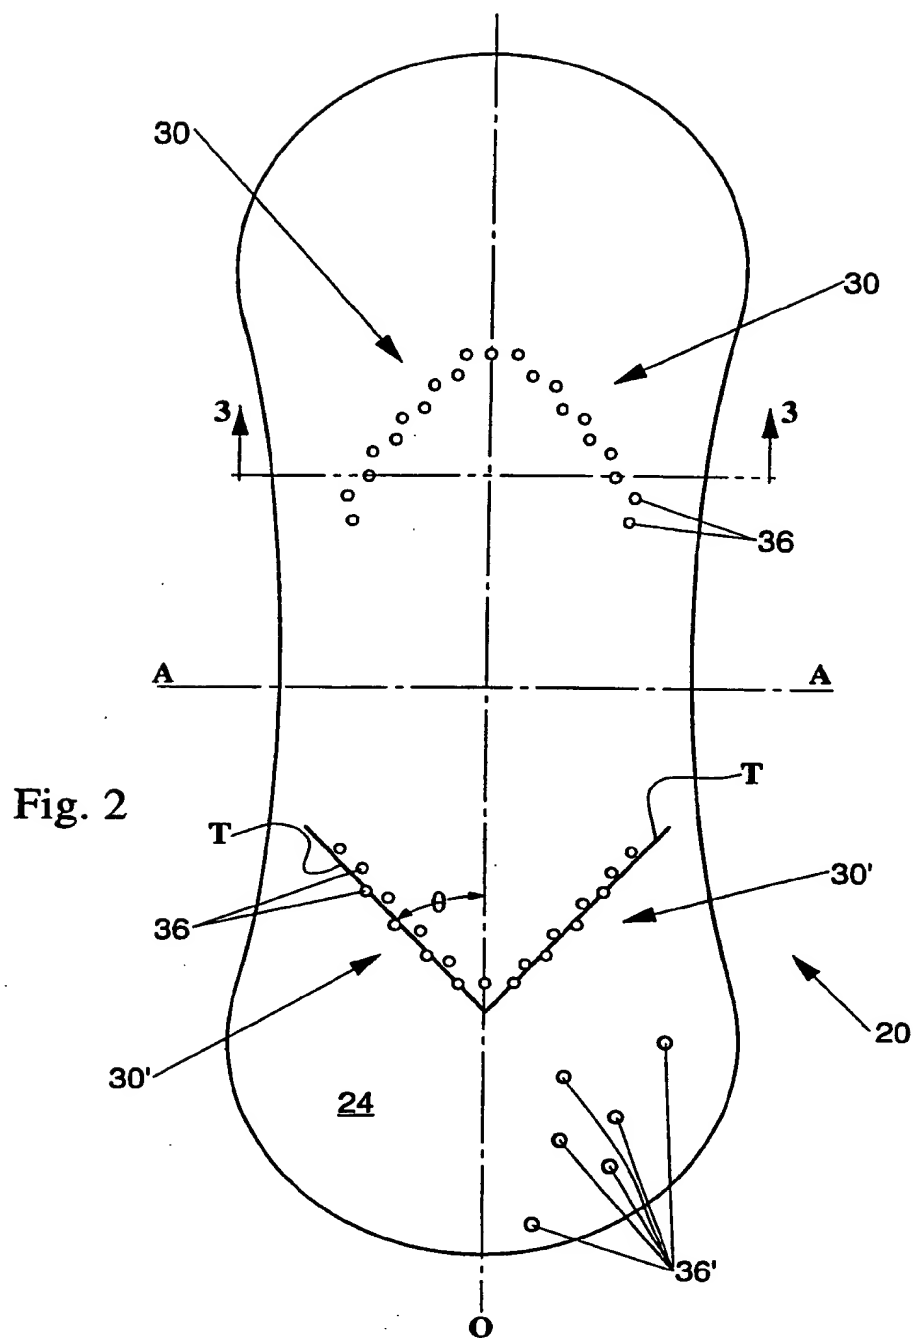

3/4

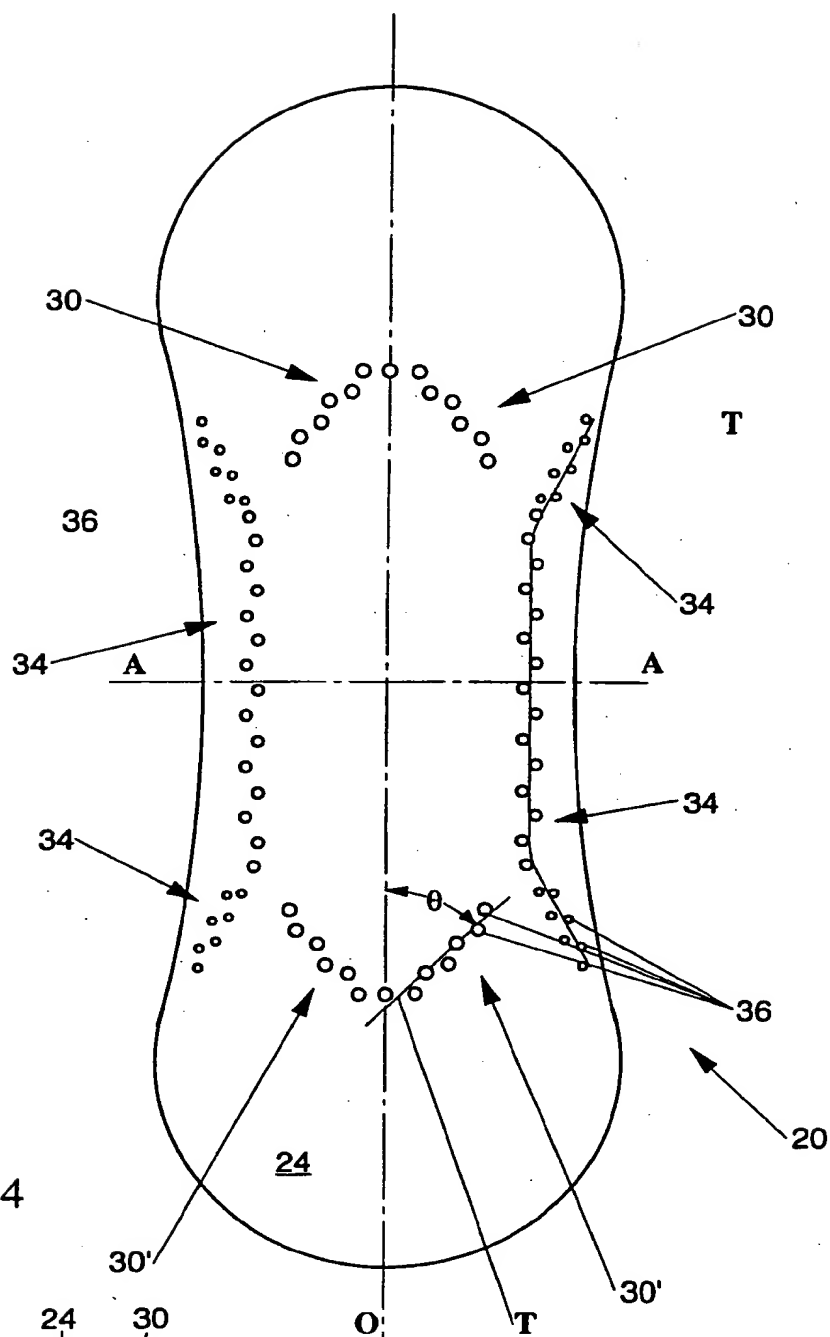


Fig. 4

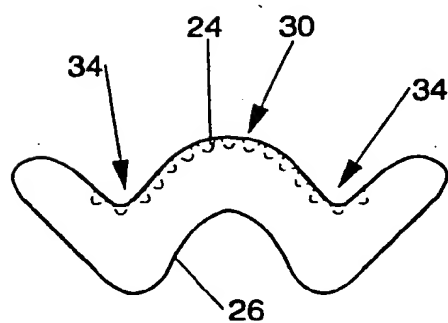


Fig. 5



4/4

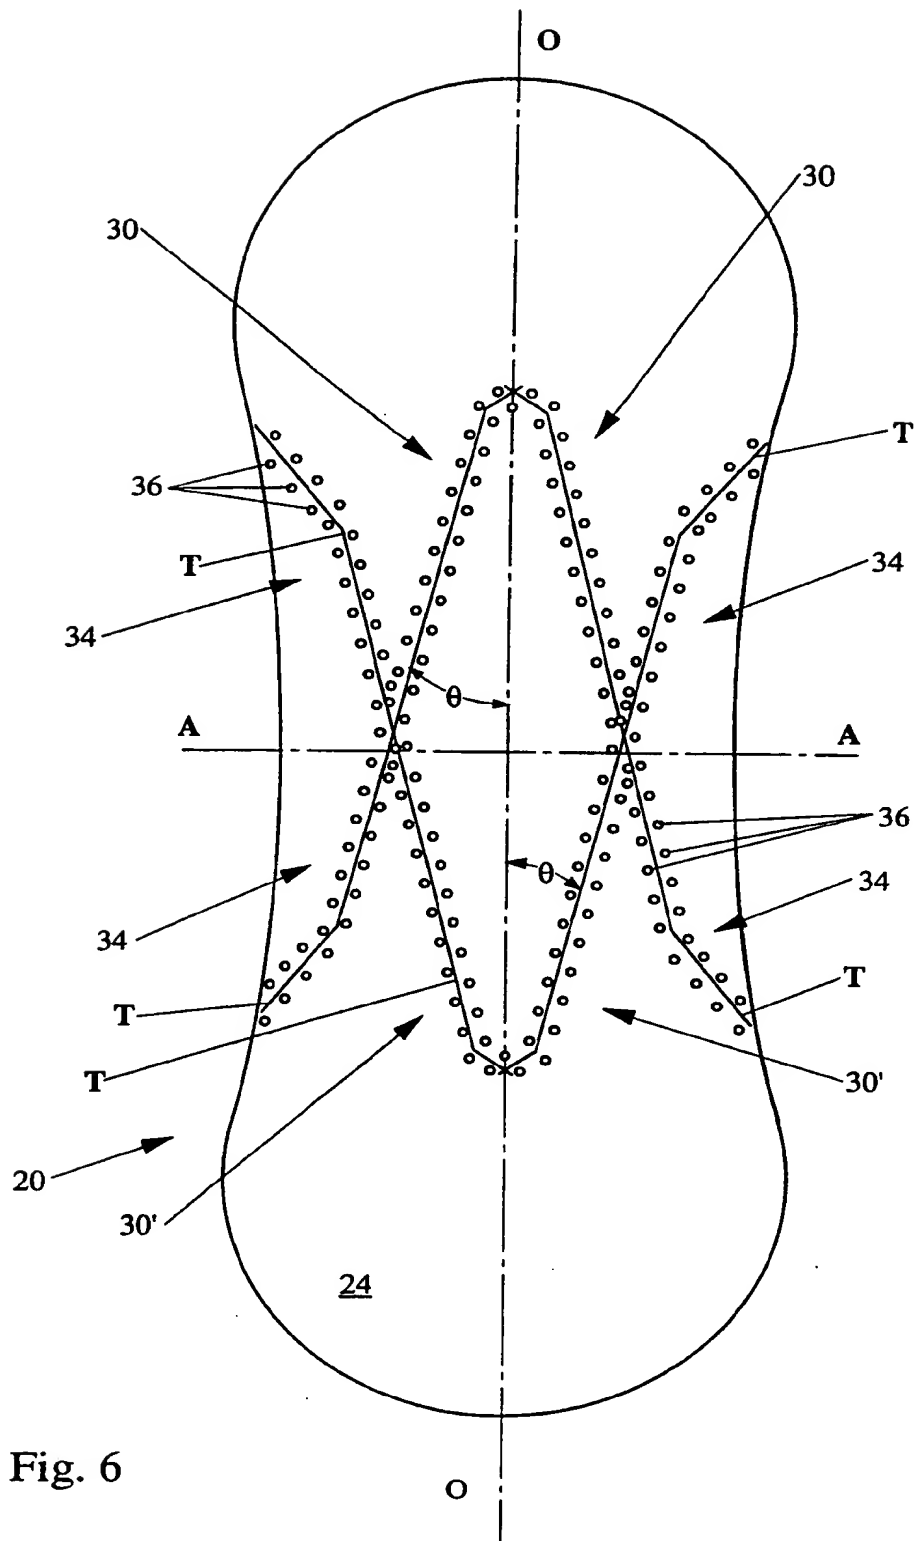


Fig. 6



**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : <b>A61F 13/15</b>		A3	(11) International Publication Number: <b>WO 95/07674</b>
			(43) International Publication Date: 23 March 1995 (23.03.95)
(21) International Application Number: <b>PCT/US94/10045</b>			(81) Designated States: AM, AU, BB, BG, BR, BY, CA, CH, CN, CZ, EE, FI, GE, HU, JP, KG, KP, KR, KZ, LK, LR, LT, LV, MD, MG, MN, NO, NZ, PL, RO, RU, SI, SK, TJ, TT, UA, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD).
(22) International Filing Date: 7 September 1994 (07.09.94)			
(30) Priority Data: 08/122,114      16 September 1993 (16.09.93)      US			
(71) Applicant: THE PROCTER & GAMBLE COMPANY [US/US]; One Procter & Gamble Plaza, Cincinnati, OH 45202 (US).			
(72) Inventors: HINES, Letha, Margie; 320 East Mills Avenue, Cincinnati, OH 45215 (US). OLSEN, Robb, Eric; 3214 Grischy Lane, Cincinnati, OH 45208 (US).			
(74) Agents: REED, T., David et al.; The Procter & Gamble Company, 5299 Spring Grove Avenue, Cincinnati, OH 45217 (US).			Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
			(88) Date of publication of the international search report: 13 April 1995 (13.04.95)

(54) Title: SANITARY NAPKIN HAVING CORE PREDISPOSED TO A CONVEX UPWARD CONFIGURATION

## (57) Abstract

A sanitary napkin which deforms to a convex upwardly shaped cross section. The sanitary napkin has a line of weakness which is symmetric about the longitudinal axis and longitudinally concave towards the lateral centerline. In a preferred embodiment, the line of weakness is discontinuous and comprises discrete sites joining the topsheet and core. The discrete sites may be bilaterally staggered about the line of weakness T.

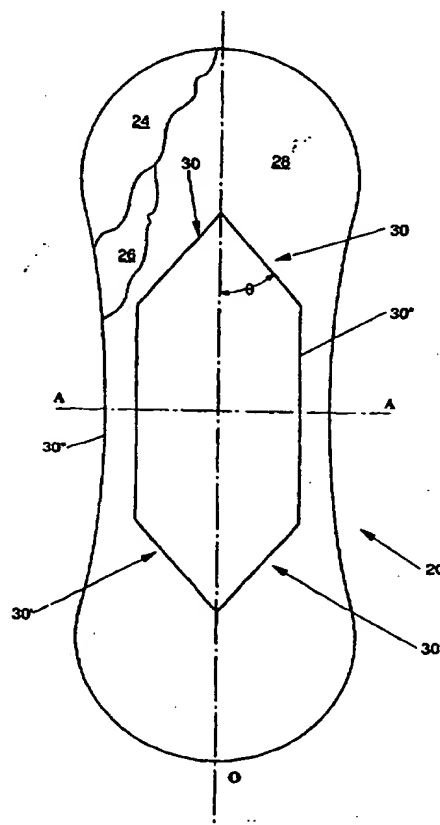



**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LJ	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				



# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 94/10045

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 A61F13/15

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
E	EP,A,0 613 671 (MC NEIL - PPC, INC.) 7 September 1994 see the whole document ---	1-5,9,10
X	EP,A,0 136 524 (ZENMI CO.. LTD) 10 April 1985 see the whole document ---	1,2,9,10
X	US,A,4 655 759 (ROMANS-HESS ET AL.) 7 April 1987 see the whole document ---	1,2,9,10
X	DE,A,40 04 729 (JOHNSON & JOHNSON) 16 August 1990 see the whole document ---	1,2,9,10
Y	---	3-8
Y	WO,A,91 09580 (MÖLNLYCKE AB) 11 July 1991 see the whole document ---	3-8
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&\* document member of the same patent family

Date of the actual completion of the international search

23 February 1995

Date of mailing of the international search report

03.03.95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Argentini, A



# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 94/10045

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>WO,A,90 14814 (MÖLNLYCKE AB) 13 December 1990  see the whole document  -----</p>	1,2,9,10



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 94/10045

PCT/03 34710045

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0613671	07-09-94	AU-B- 5515494 BR-A- 9400626 CA-A- 2116073 GR-A- 94100082 JP-A- 6296644	25-08-94 18-10-94 23-08-94 31-10-94 25-10-94
EP-A-0136524	10-04-85	JP-A- 60053144 AU-A- 3236084	26-03-85 07-03-85
US-A-4655759	07-04-87	NONE	
DE-A-4004729	16-08-90	AU-B- 635242 AU-A- 4975790 CA-A- 2009894 FR-A- 2642974 JP-A- 2277453 US-A- 5312386	18-03-93 23-08-90 15-08-90 17-08-90 14-11-90 17-05-94
WO-A-9109580	11-07-91	AU-B- 647766 AU-A- 7030491 EP-A- 0591159 HU-A- 65583 SE-A- 8904317 US-A- 5366452	31-03-94 24-07-91 13-04-94 28-07-94 22-06-91 22-11-94
WO-A-9014814	13-12-90	SE-B- 463746 EP-A, B 0474777 JP-T- 4506022 SE-A- 8901965 US-A- 5211641	21-01-91 18-03-92 22-10-92 01-12-90 18-05-93



**This Page Blank (uspto)**